

RE 91 703/09.99

Replaces: 08.98



Dual displacement motor A10VM

Plug-in dual displacement motor A10VE


for open and closed circuit applications

Size 28 - 85

Series 5

Nominal pressure 280 bar

Peak pressure 350 bar

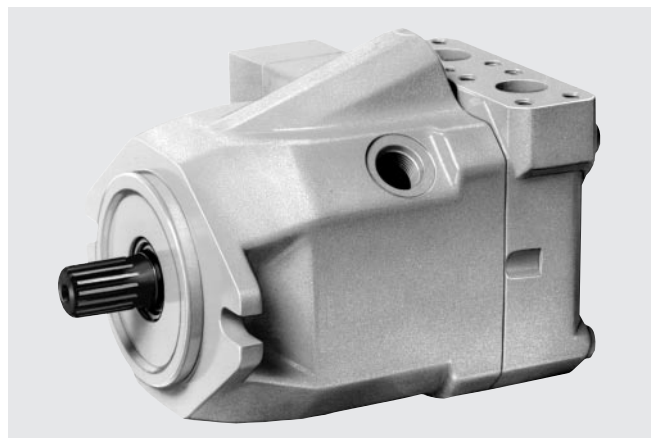


A10VM

Contents

Features	1
Ordering code / Standard range	2
Hydraulic fluid / Filtration / Installed position	3
Technical data	4
Direct control pressure DG	5
Hydraulic two-point control HZ	6
Electrical two-point control EZ.	7
Unit dimensions A10VM 28 DG, port plate 60	8
Unit dimensions A10VM 28 HZ, port plate 66	9
Unit dimensions A10VE 28 EZ, port plate 60	10
Unit dimensions A10VM 45 DG, port plate 64	11
Unit dimensions A10VM 45 EZ, port plate 60 and 61	12
Unit dimensions A10VE 45 HZ, port plate 66	13
Unit dimensions A10VM 63 EZ, port plate 60	14
Unit dimensions A10VE 63 EZ, port plate 60	15
Integrated flushing valve	16

– Further information:

Dual displacement motor A10VEC for track and wheel drives Size 45	RE 91 710
Fixed displacement motor A10FSM Size 18	RE 91 180
Fixed displacement motor A10FM Size 23 - 63	RE 91 172

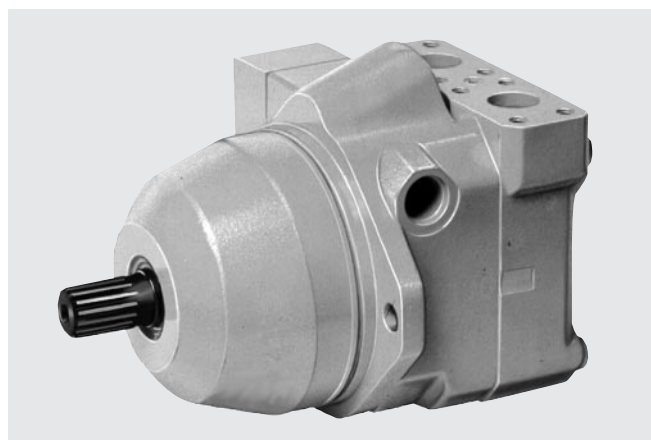

A10VE

Features

- Dual displacement motor, axial piston in swashplate design for hydrostatic transmissions in open and closed circuit applications
- Output speed directly proportional to the inlet flow and inversely proportional to the motor displacement
- Output torque increases proportional to the pressure difference between high and low-pressure sides and increasing displacement
- Heavy-duty bearings for long service life
- High permissible output speed
- Well proven A10 rotary unit technology
- High power/weight ratio – compact size
- Cost effective
- Low noise
- Control range 1 : 3.75
- External direct control supply possible
- Minimum displacement can be set externally
- SAE 2-bolt mounting flange on A10VM
- Special 2-bolt flange on A10VE



Ordering code / standard range

A10V										/ 5 2 W - V									
Hydraulic fluid																			
Mineral oil (without prefix)																			
Axial piston motor																			
Swash plate design, variable, nominal press. 280 bar, peak press. 350 bar										A10V									
Operating mode																			
Motor										M									
Plug-in motor										E									
Size										* Hint for sizes 28 and 45 Interchangeability with pressure range 250/315 bar and previous flange port patterns on request									
≙ Motor displacement V_g in cm^3										28* 45* 63 85 ● ● ● ○									
Control devices																			
Two-point direct control, external control supply, without pilot valve										DG ● ● ○ ○ DG									
Two-point control, hydraulic										HZ ● ● ○ ○ HZ HZ 6 ● ● ○ ○ HZ6									
Two-point control, electrical with two-position valve										EZ 1 ● ● ● ○ EZ1 EZ 6 ● ● ● ○ EZ6 EZ 2 ● ● ● ○ EZ2 EZ 7 ● ● ● ○ EZ7									
										} Control voltage 12V } Control voltage 24V									
										with orifice for increase of response time									
Series										5									
Design index										2									
Direction of rotation (Viewing onto shaft end)										bi-directional W									
Minimum displacement										Size 28 45 63 85 V_{gmin} (in cm^3) infinitely variable from 8 12 16 22 1 to 28 25 38 50 from – 26 40 48 2 to – 45 62 87 V_{gmin} – Adjustment, please state in clear text when ordering									
Seal										V									
FKM (fluororubber to DIN ISO 1629)																			
Shaft end										28 45 63 85 SAE spline shaft (for details see unit dimensions) ● ● ● ○ R SAE spline shaft (for details see unit dimensions) – ● ● ○ W									
Mounting flange										SAE 2-hole flange for A10VM ● ● ● ○ C Special 2-hole flange for A10VE ● ● ● ○ F									
Ports for service lines																			
Ports A/B at side - same side; SAE flange, UNC fixing screws										● ● ● ○ 60N00									
Ports A/B at side - same side; SAE flange, metric fixing screws										○ ○ ○ ○ 10N00									
Ports A/B at side - same side; UNF threaded ports										● ● ○ – 66N00									
Ports A/B at side - same side; metric threaded ports										○ ○ ○ – 16N00									
Ports A/B at rear; SAE flange, UNC fixing screws										○ ● ○ ○ 61N00									
Ports A/B at rear; SAE flange, metric fixing screws										○ ○ ○ ○ 11N00									
Ports A/B at rear; UNF threaded ports										○ ● ○ – 64N00									
Valves										28 45 63 85 Without valves ● ● ● ○ 0 Integrated flushing valve, only with ports at side (60N00, 10N00, 66N00 und 16N00) ● ● ● ○ 7									
Speed monitoring																			
Without speed monitoring (no code)										● ● ● ○ –									
Prepared for speed monitoring, A10VM only										○ ○ ○ ○ D									

– = not available ○ = in preparation ● = available

Technical data

Hydraulic fluid

For extensive information on the selection of fluids and for application conditions, please consult our data sheets RE 90220 (mineral oils) or RE 90221 (environmentally acceptable hydraulic fluids).

You might have to consider reduced operating data with environmentally acceptable hydraulic fluids. Please contact our technical department (please indicate type of the hydraulic fluid used for your application on the order sheet).

Operating viscosity range

In order to obtain optimum efficiency and service life, we recommend that the operating viscosity (at operating temperature) be selected from within the range:

$$v_{\text{opt}} = \text{opt. operating viscosity } 16 \dots 36 \text{ mm}^2/\text{s}$$

referred to the circuit temperature (closed circuit) or tank temperature (open circuit).

Viscosity limits

The limiting values for viscosity are as follows:

$$v_{\text{min}} = 5 \text{ mm}^2/\text{s}$$

short term at a max. permissible temperature of $t_{\text{max}} = 115^\circ\text{C}$.


Please note that the maximum fluid temperature must also not exceed 115°C in certain areas (e.g. bearing area).

$$v_{\text{max}} = 1600 \text{ mm}^2/\text{s}$$

short term on cold start ($t_{\text{min}} = -40^\circ\text{C}$).

Special precautions are required at temperatures between -25°C and -40°C , depending on the installation conditions. Please consult our technical department.

Selection diagram

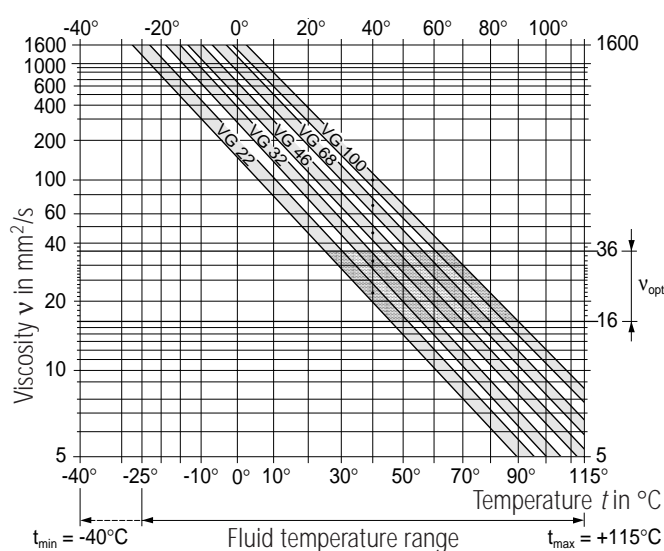

Notes on the selecting of the hydraulic fluid

In order to select the correct fluid, it is necessary to know the operating temperature in the loop (closed circuit) or the tank temperature (open circuit) in relation to the ambient temperature.

The hydraulic fluid should be selected so that within the operating temperature range, the operating viscosity lies within the optimum range (v_{opt}) (see shaded section of the selection diagram). We recommend that the highest possible viscosity range should be chosen in each case.

Example: At an ambient temperature of $X^\circ\text{C}$ the operating temperature (closed circuit: loop temperature; open circuit: tank temperature) is 60°C . Within the operating viscosity range (v_{opt} ; shaded area), this corresponds to viscosity ranges VG 46 or VG 68; VG 68 should be selected.

Important: The leakage oil (case drain oil) temperature is influenced by pressure and motor speed and is always higher than the circuit or tank temperature. However, at no point in the circuit may the temperature exceed 115°C .

If it is not possible to comply with the above conditions because of extreme operating parameters or high ambient temperatures please consult us.

Filtration of fluid

The finer the filtration the better the achieved cleanliness of the pressure fluid and the longer the life of the axial piston unit.

To ensure the functioning of the axial piston unit a minimum cleanliness of:

9 to NAS 1638

18/15 to ISO/DIS 4406.


Please consult us, if it is not possible to comply with the above conditions.

Mounting position


Any. The motor housing must be filled with hydraulic fluid when starting up and during operation. The leakage fluid line must be routed so that the housing is not drained when the motor stops. The end of the line must enter the tank below the minimum oil level.

The highest leakage oil port must be used in all installation positions to fill the housing and to connect the drain line.

A10VM



A10VE



Please consult Brueninghaus Hydromatik if the motor is to be installed vertically.

Technical data

Operating pressure range

Pressure at port A or B
(Pressure data to DIN 24312)

Nominal pressure p_N _____ 280 bar

Peak pressure p_{max} _____ 350 bar

Sum of the pressure at ports A and B must not exceed 560 bar.

Case drain pressure

Maximum permissible case pressure at ports L and L₁

$p_{abs\ max}$ _____ 2 bar abs.

Direction of rotation

Flow B to A = Right-hand rotation

Flow A to B = Left-hand rotation

Displacement

The minimum displacement steplessly adjustable within the range of the screw lengths 1 or 2 (see model code page 2).


Please state min. displacement in clear text when ordering; it will be factory set.

Table of values (theoretical values, ignoring η_{mh} and η_v ; values rounded)


Size			28	45	63	85
Motor displacement	$V_{g\ max}$	cm ³	28	45	62	87
	$V_{g\ min}$	cm ³	8	12	16	22
Max. speed ¹⁾	at $V_{g\ max}$	n_{max}	rpm	4700	4000	3300
	at $V_{g\ min}$	n_{max}	rpm	5300	4600	3800
Max. inlet flow	at n_{max} and $V_{g\ max}$	$q_{v\ max}$	L/min	131.6	180	205
Max. output power	at n_{max} and $V_{g\ max}$	P_{max}	kW	61	84	95
Max. torque	at $V_{g\ max}$	T_{max}	Nm	125	200	276
Mass moment of inertia (about the output shaft)	J	kgm ²	0.0017	0.0033	0.0056	0.0167
Filling volume, approx.	L		0.6	0.7	0.8	1
Weight, approx.	m	kg	14	18	26	34
Permissible load on output shaft, max. perm. axial force	$F_{ax\ max}$	N	1000	1500	2000	3000
Max. perm. radial force	$F_{q\ max}$	N	1200	1500	1700	2000
Actual starting torque at $n = 0$ rpm	$\Delta p = 280$ bar	Nm(approx.)	92	149	205	253

¹⁾ At max. speed the low pressure must see at least 18 bar.

Determination of n_{max}

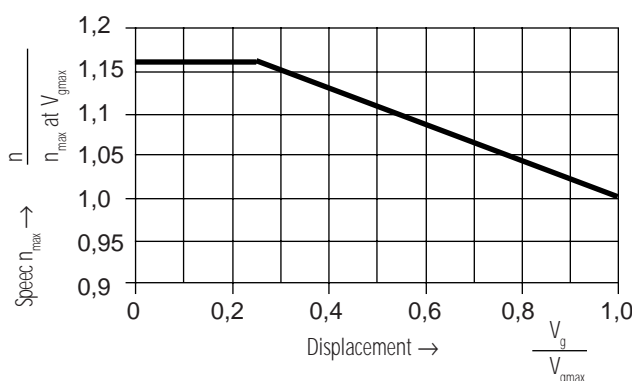

Applied force



Calculating size

Inlet flow $q_v = \frac{V_g \cdot n}{1000 \cdot \eta_v}$ [L/min]

Torque $T = \frac{1.59 \cdot V_g \cdot \Delta p \cdot \eta_{mh}}{100}$ [Nm]

Output power $P = \frac{T \cdot n}{9549} = \frac{q_v \cdot \Delta p \cdot \eta_t}{600}$ [kW]

Output speed $n = \frac{q_v \cdot 1000 \cdot \eta_v}{V_g}$ [rpm]

V_g = geometric motor displacement per revolution [cm³]

Δp = pressure differential [bar]

n = speed [rpm]

η_v = volumetric efficiency

η_{mh} = mechanical-hydraulic efficiency

η_t = total efficiency ($\eta_t = \eta_v \cdot \eta_{mh}$)

Direct control pressure DG


Normally, the motor is at max. displacement. By applying an external pressure to port G, the destroking piston is directly pressurized and the motor switches to minimum displacement.

The minimum required control pressure is $p_{st} \geq 40$ bar.

This control pressure depends directly on the working pressure p_B in port A or B.

See control pressure diagram below. With a control pressure above this minimum required pressure level the motor will destroke properly.

Control pressure diagram

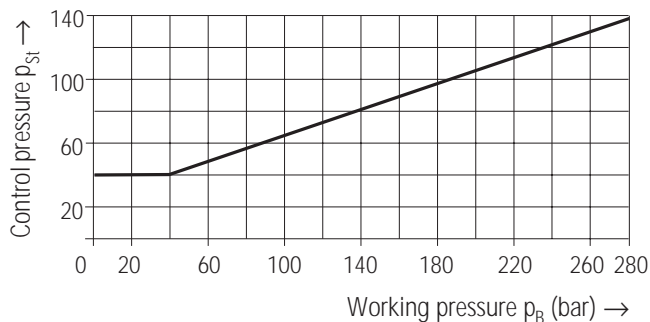


Control pressure = 0 bar $\hat{=}$ $V_{g \max}$

Control pressure ≥ 40 bar $\hat{=}$ $V_{g \min}$ (see control pressure diagram)

The maximum permissible control pressure $p_{st} = 280$ bar.

$V_{g \min}$ - setting, please state in clear text when ordering.

Circuit diagram

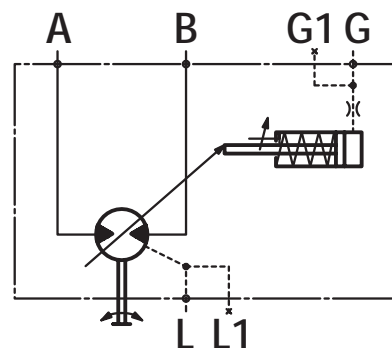

Ports

A, B Pressure ports

L, L₁ Drain ports

G, G1 External control pressure ports

Hydraulic two-point control HZ / HZ6


Normally, the motor is at max. displacement. By applying a pilot pressure p_X to port X ($p_X \geq 30\text{ bar}$), the destroking piston is pressurized and the motor switches to minimum displacement.

The necessary control pressure is via a shuttle valve, taken out of the port A or B.

A minimum operating pressure difference of $\Delta p_{A,B} \geq 20\text{ bar}$ is required.

Only max. and min. displacements are possible.

$V_{g\min}$ - setting, please state in clear text when ordering.

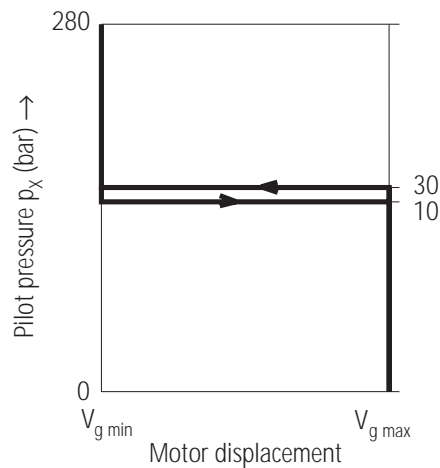

Pilot pressure $p_X = 0\text{ bar} \triangleq V_{g\max}$
 Pilot pressure $p_X \geq 30\text{ bar} \triangleq V_{g\min}$

Technical data HZ / HZ6

Minimum pilot pressure	30 bar
Max. permissible pilot pressure	280 bar

Control HZ6 with shuttle orifice to increase swivel time

Slow down of swivel action by means of shuttle orifice.


This enables a smooth swivel action.

Standard shuttle orifice size = 0,21 mm; other sizes on request.

Ports

A,B Pressure ports
 L, L₁ Drain ports
 X Pilot pressure port


Circuit diagram HZ

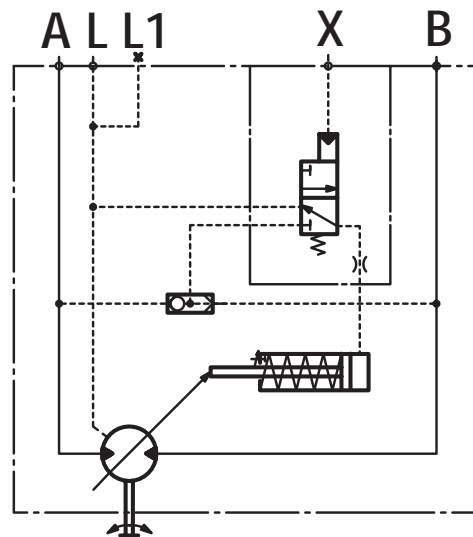

Ports

A,B Pressure ports
 L, L₁ Drain ports
 X Pilot pressure port

Circuit diagram HZ6

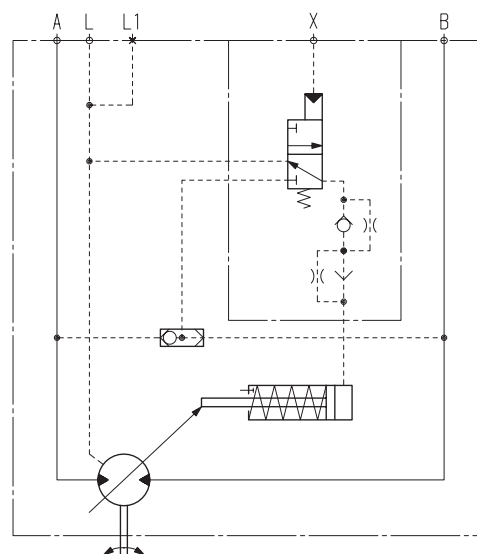

Electrical two-point control EZ.


Normally, the motor is at max. displacement. By energizing the solenoid of the control valve, the destroking piston is pressured, and the motor switches to minimum displacement.

The necessary control pressure is via a shuttle valve, taken out of the port A or B.

A minimum operating pressure difference of $\Delta p_{A,B} \geq 20$ bar is required.


Only max. and min. displacements are possible.

$V_{g \min}$ - setting, please state in clear text when ordering.

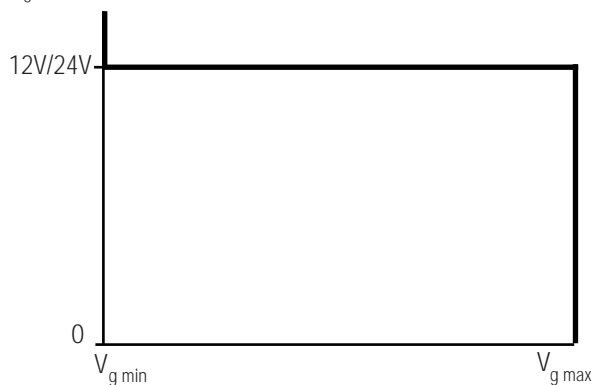

De-energized $\triangleq V_{g \max}$
 Energized $\triangleq V_{g \min}$

Circuit diagram EZ1/2

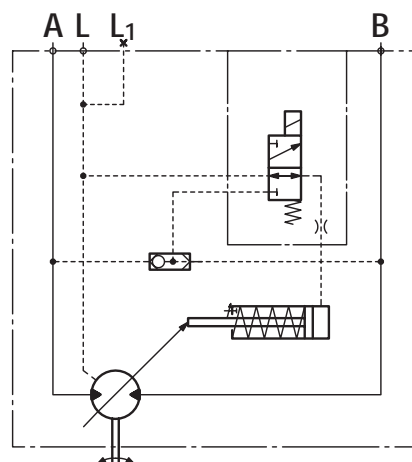

Ports

A, B Pressure ports
 L, L₁ Drain ports


Technical data EZ.

Type	EZ1/6	EZ2/7
Supply voltage (DC)	12 V	24 V
Power consumption	26 W	26 W
Duty cycle	100%	100%
Type of protection	IP 65	IP 65


Features:

- With spring return
- Solenoid plug can be turned 4 x 90°

Connection to solenoid



Connection to plug




Control EZ6/7 with shuttle orifice to increase swivel time

Slow down of swivel action by means of shuttle orifice.

This enables a smooth swivel action.

Standard shuttle orifice size = 0,21 mm; other sizes on request.

Circuit diagram EZ6/7

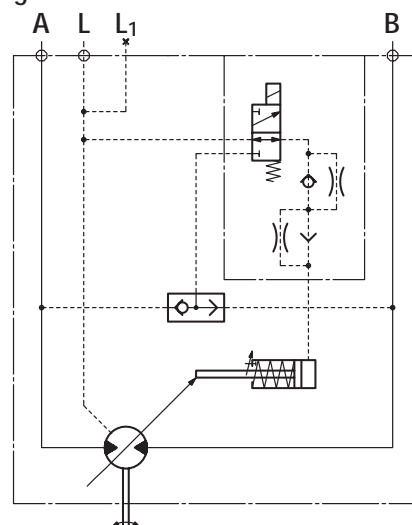

Ports


A, B Pressure ports
 L, L₁ Drain ports

Unit dimensions A10VM; size 28



Two-point direct control DG
port plate 60

Before finalising your design, please request certified assembly drawing.

Flange 101-2
SAE J744 OCT 83

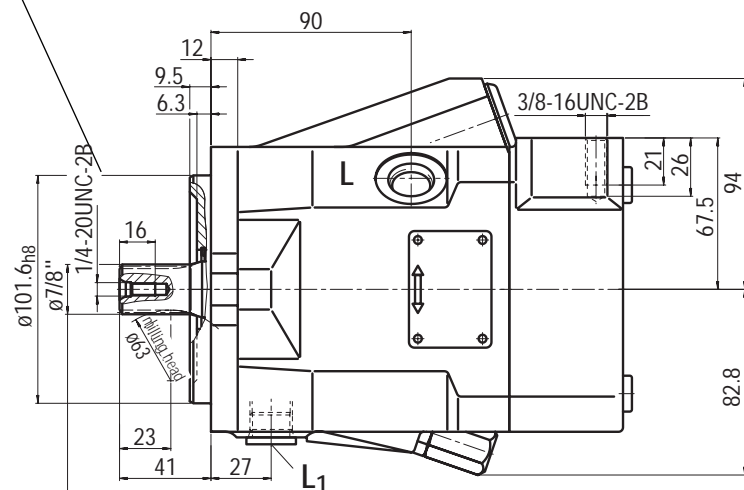

Shaft R 22-4; SAE J744 OCT 83
7/8" dia. splined shaft; 30° pressure angle; 13 teeth;
16/32 pitch; flat base; flank centering;
fit class 5; ANSI B92. 1a-1976

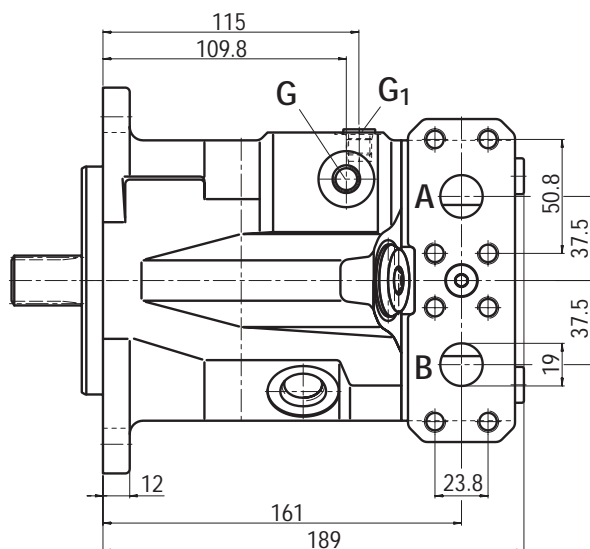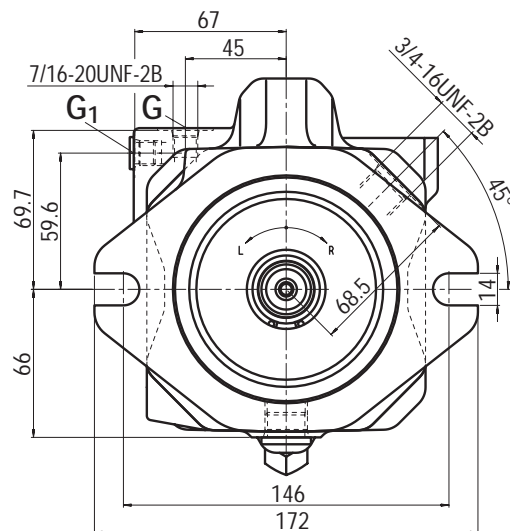


Ports

A, B	Pressure ports	SAE flange 3/4 ", high-pressure series (code 62)
L, L ₁	Drain ports	3/4 - 16 UNF - 2B (L ₁ plugged)
G, G ₁	External control pressure ports	7/16 - 20 UNF - 2B (G ₁ plugged)



Unit dimensions A10VE; size 28

Two-point electrical control EZ. with two-position valve,
port plate 60


Before finalising your design, please request certified assembly drawing.

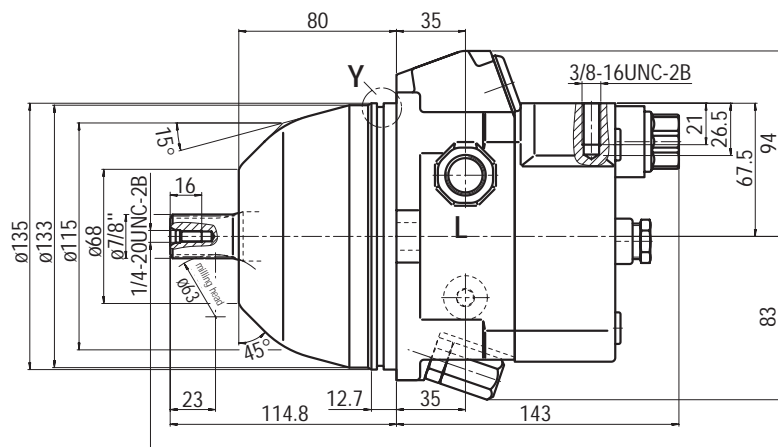

Shaft **R** 22-4; SAE J744 OCT 83
7/8" dia. splined shaft; 30° pressure angle; 13 teeth;
16/32 pitch; flat base; flank centering;
fit class 5; ANSI B92. 1a-1976

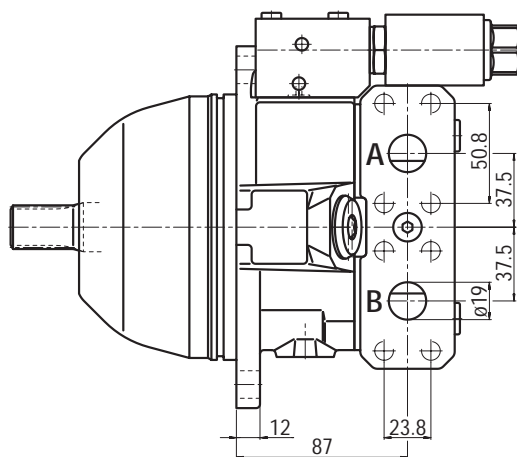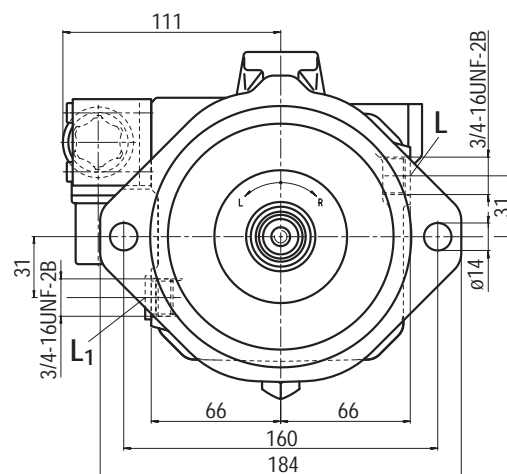

Detail Y




Ports

A,B Pressure ports SAE flange 3/4 ", high-pressure series (code 62)
L, L₁ Drain ports 3/4 - 16 UNF - 2B (L₁ plugged)


Unit dimensions A10VM; size 45

Two-point control, direct control pressure DG,
port plate 64


Before finalising your design, please request certified assembly drawing.

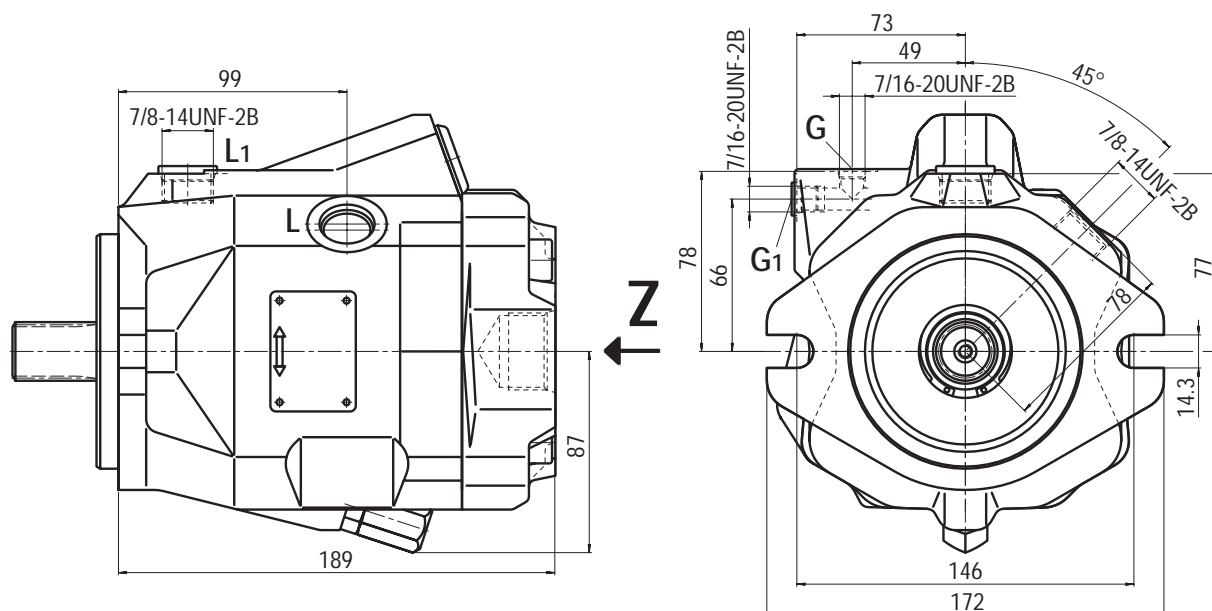

Shaft **R** 25-4; SAE J744 OCT 83
1" dia. splined shaft; 30° pressure angle; 15 teeth;
16/32 pitch; flat base; flank centering;
fit class 5; ANSI B92. 1a-1976

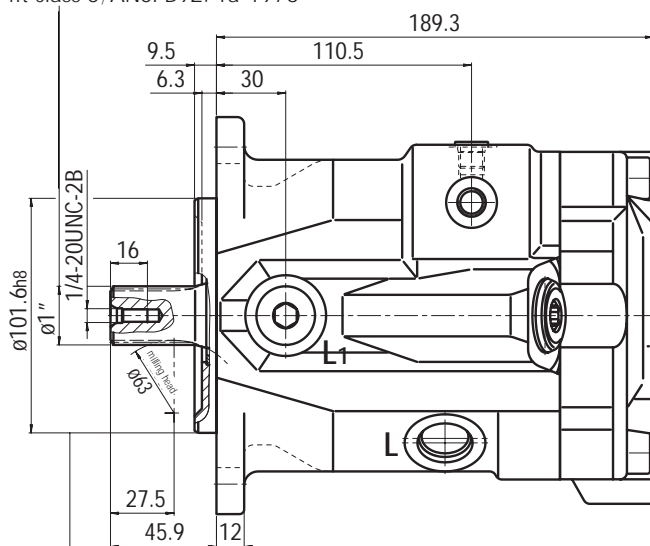

Flange 101-2
SAE J744 OCT 83

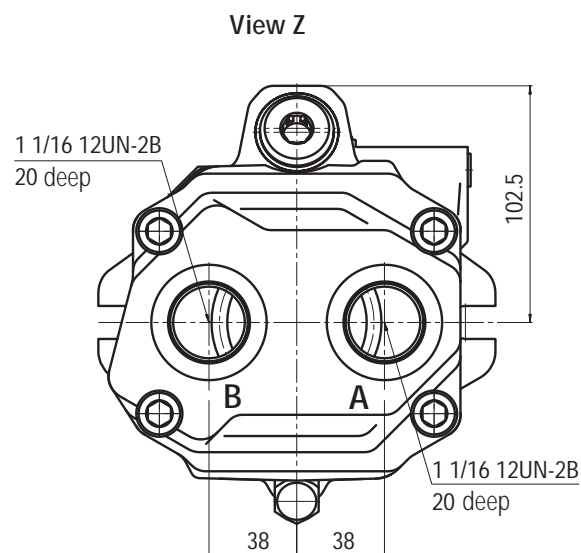

Shaft **W** see page 12.



Ports

A,B	Pressure ports	Threaded O-ring boss 1 1/16 12UN-2B
L, L ₁	Drain ports	7/8-14UNF-2B (L ₁ plugged)
G, G ₁	External control pressure ports	7/16-20UNF-2B (G ₁ plugged)


Unit dimensions A10VM; size 45

Two-point electrical control EZ. with two-position valve,
port plate 60 and 61

Before finalising your design, please request certified assembly drawing.

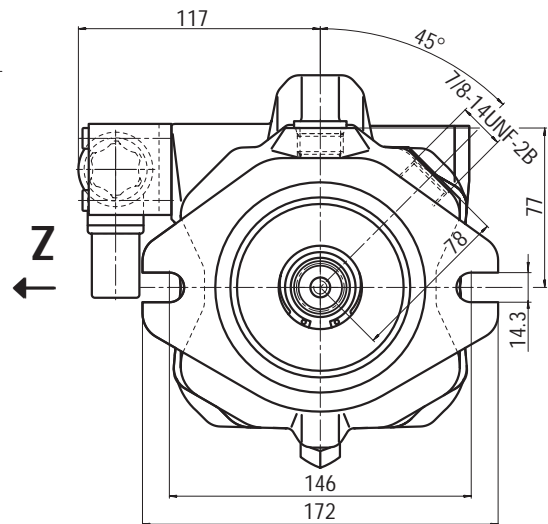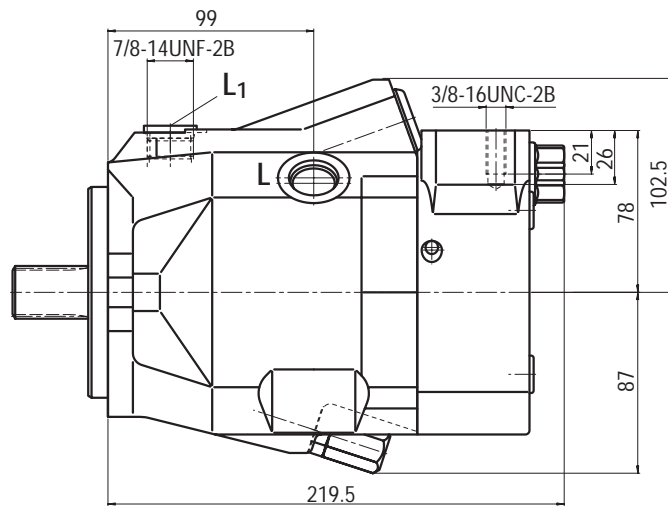


Shaft **R** 25-4; SAE J744 OCT 83
1" dia. splined shaft; 30° pressure angle; 15 teeth;
16/32 pitch; flat base; flank centering;
fit class 5; ANSI B92. 1a-1976

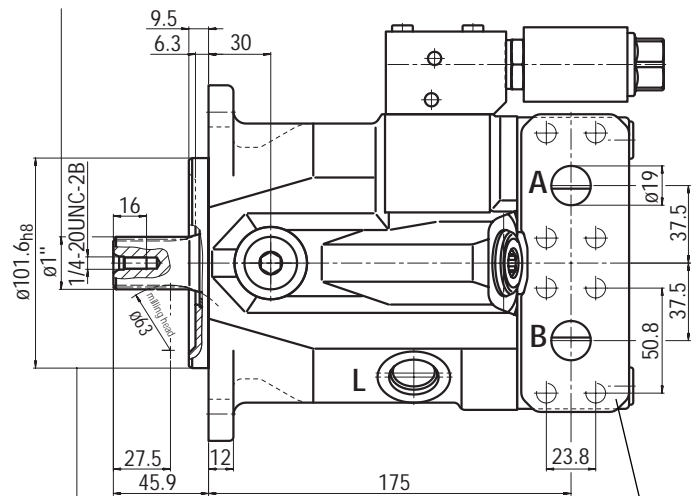


Flange 101-2
SAE J744 OCT 83

Port plate 60

Port plate 61, View Z

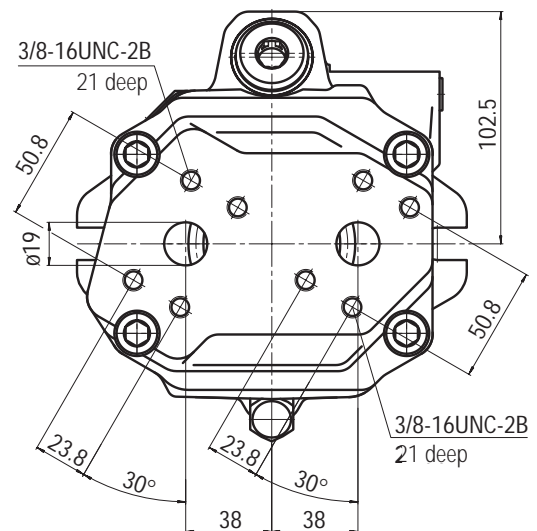

Shaft **W** 22-4; SAE J744 OCT 83
7/8" dia. splined shaft; 30° pressure angle; 13 teeth;
16/32 pitch; flat base; flank centering;
fit class 5; ANSI B92. 1a-1976

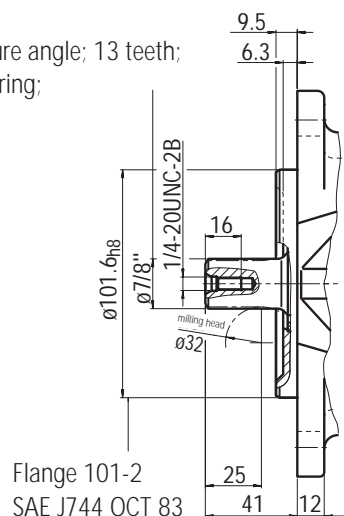

Flange 101-2
SAE J744 OCT 83



Ports

A, B	Pressure ports	SAE flange 3/4", high-pressure series (code 62)
L, L ₁	Drain ports	7/8-14UNF-2B (L ₁ plugged)

Unit dimensions A10VM; size 63

Two-point electrical control EZ. with two-position valve,
port plate 60,
and integrated flushing- and boost pressure valve N007

Before finalising your design, please request certified assembly drawing.

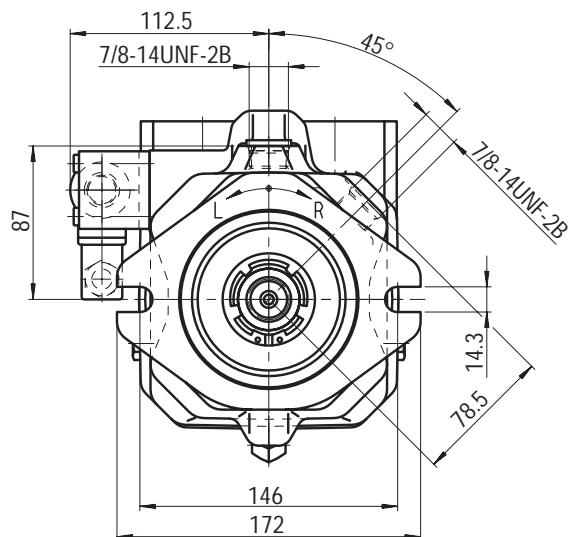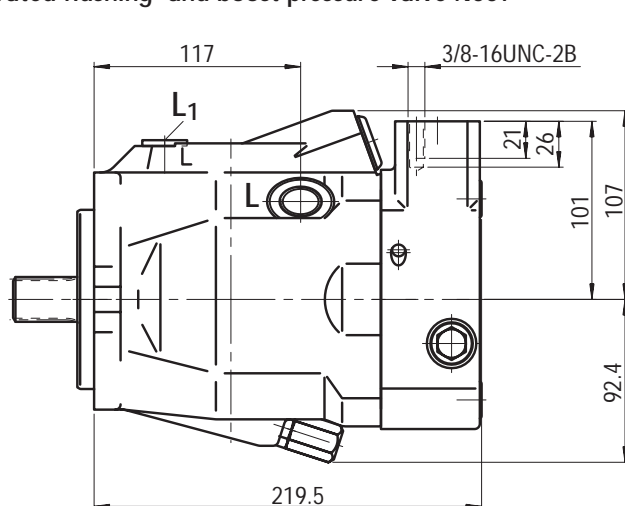


Shaft **W** 25-4; SAE J744 OCT 83

1" dia. splined shaft; 30° pressure angle; 15 teeth;

16/32 pitch; flat base;

flank centering; fit class 5; ANSI B92. 1a-1976

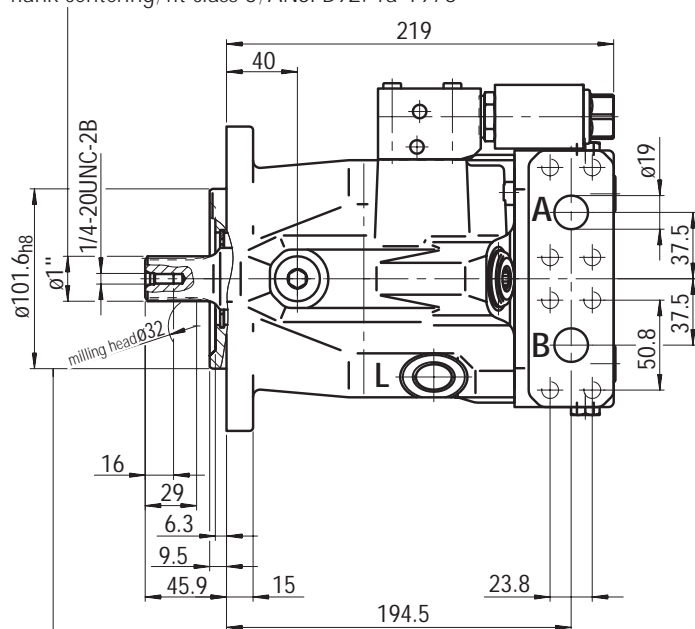

Flange 101-2
SAE J744 OCT 83

Ports


A,B Pressure ports SAE flange 3/4 ", high-pressure series (code 62)

L, L₁ Drain ports 7/8-14UNF-2B (L₁ plugged)


Unit dimensions A10VE; size 63

Two-point electrical control EZ. with two-position valve,
port plate 60,
and integrated flushing- and boost pressure valve N007


Before finalising your design, please request certified assembly drawing.

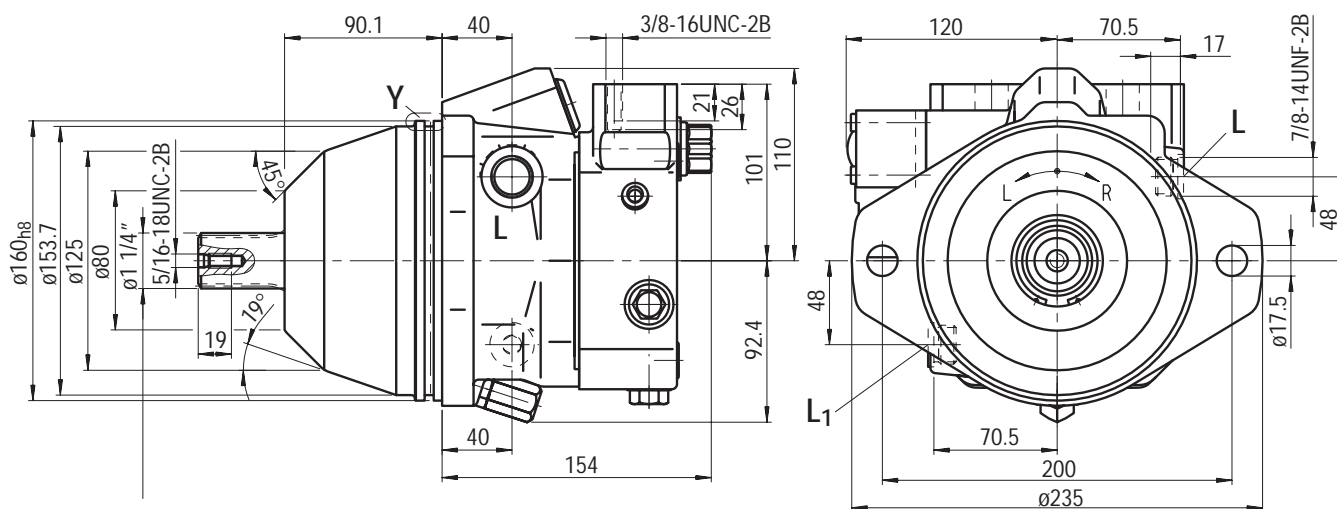

Shaft **R** 32-4; SAE J744 OCT 83
1 1/4" dia. splined shaft; 30° pressure angle; 14 teeth;
12/24 pitch; flat base; flank centering;
fit class 5; ANSI B92. 1a-1976

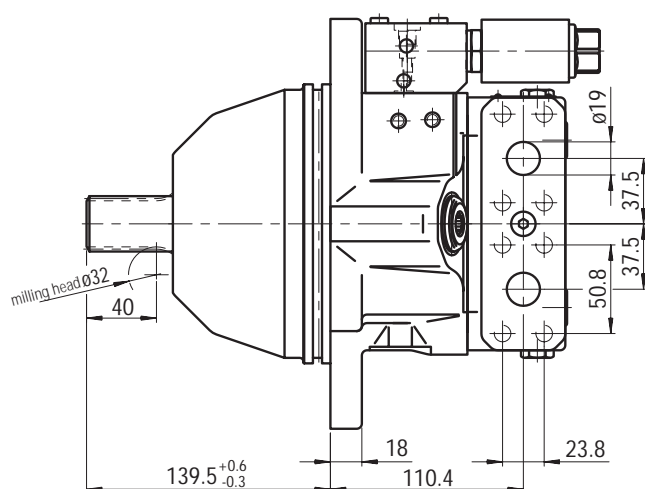

Detail Y



Ports

A,B Pressure ports SAE flange 3/4", high-pressure series (code 62)
L, L₁ Drain ports 7/8-14UNF-2B (L₁ plugged)

Integrated flushing and boost pressure valve

Before finalising your design, please request certified assembly drawing.

Flushing and boost pressure valve N007

The flushing and boost pressure valve is used in closed circuit applications to avoid any excessive build-up of heat and to safeguard the minimum boost pressure (16 bar, fixed). The valve is integrated into the port plate.

A fixed flow, determined by an orifice, is flushed out of the low-pressure side and discharged into the motor housing. Together with the leakage oil, it flows via the drain port to the tank. The fluid withdrawn from circulation in this way must be replaced with cooled oil from the boost pump.


Standard flushing flow

At low pressure of 25 bar and orifice dia. 1.6 mm the flushing flow amounts to



6.5 L/min (sizes 28 - 63)

Other flushing flows available on request

Circuit diagram

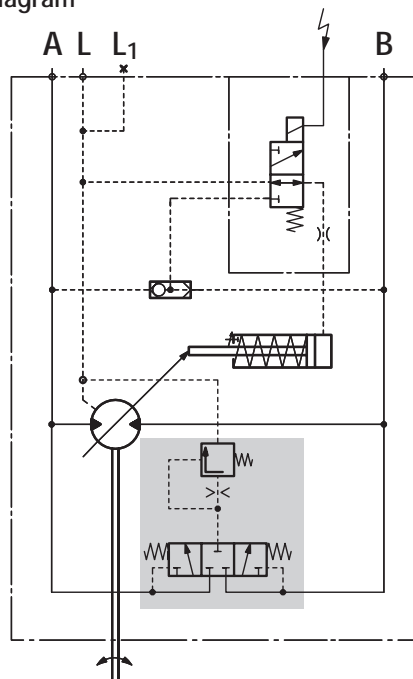

Unit dimensions A10VM with integrated flushing and boost pressure valve

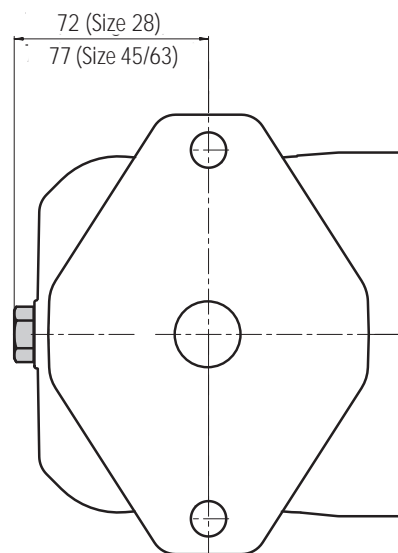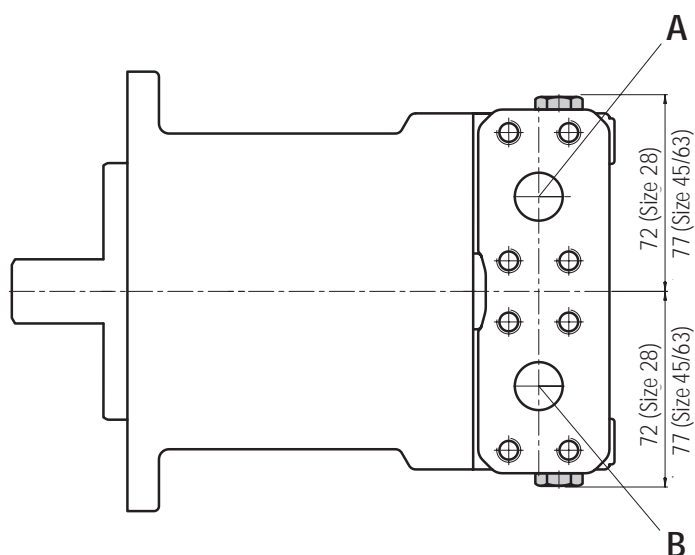

Brueninghaus Hydromatik GmbH

Plant Horb

An den Kelterwiesen 14 • D-72160 Horb

Telefon +49 (0) 74 51 / 92-0

Telefax +49 (0) 74 51 / 82 21

The data in this document is quoted solely for purposes of product description and should not be considered to constitute guaranteed and legally binding properties.